

(00) 340382230000000009

Logomatic Series 900

High speed P&A pallet/case  
labelling solution



[www.Logopak.com](http://www.Logopak.com)

**Industrial  
build quality**

- Maximum sized label rolls (1,200 m)
- 3 side application (pallets)



**Industrial**  
Print & Apply Labelling

**Models**

- ✓ 910: for labels to 110 mm width
- ✓ 920: for labels to 210 mm width
- ✓ 930: for labels to 300 mm width

**Printing characteristics**

- ✓ Thermal direct or thermal transfer printing method for labels up to A3
- ✓ Print resolution: 203 dpi or 300 dpi

**Label material**

- ✓ Running length: up to 1,200 m
- ✓ Outer diameter: 480 mm
- ✓ Label core: 76/152 mm

**Operation**

- ✓ NEK touchscreen function for numeric entry
- ✓ Optional: TDI 10" colour display
  - with touchscreen function
  - with alphanumeric entry
  - multilingual user interface
  - current label display

**Interfaces**

- ✓ Integrated Ethernet port
- ✓ High-speed RS-232 or RS-422 (optional: plus 2x RS-232 or RS-422)
- ✓ Digital I/O (potential-free outputs)

**Standard functions**

- ✓ Standard barcodes and 2D codes
- ✓ Logos and graphics
- ✓ Internal article database
- ✓ Integrated real-time clock
- ✓ Individually programmable counters
- ✓ Fault diagnosis
- ✓ Compressed air monitoring
- ✓ Maintenance interval display

**Ambient conditions**

- ✓ Operating temperature: 5 °C – 37 °C
- ✓ Humidity: 20 % – 85 % relative, non-condensing
- ✓ Electrical connection: 100 – 240 Volt; 50 – 60 Hz
- ✓ Compressed air: 6 bar ½" BSP fixed, oil & water free

**Frames and protective enclosure**

- ✓ H foot frame
- ✓ Optional: machine enclosure made from steel plate, with inspection windows, service doors and automatic flap control

**Software**

- ✓ Middleware package: LogoSoft
- ✓ Label design: LEAP Express
- ✓ Management software: LogoRemote
- ✓ Real-time connectivity
- ✓ Stand-alone

**Additional options**

- ✓ RFID
- ✓ Barcode verification (Vericoder)
- ✓ Barcode validation (Scanner)
- ✓ Low material warning
- ✓ Alarm pole
- ✓ Profibus/profinet
- ✓ Emergency stop
- ✓ Height and side adjustment (manual/automatic)
- ✓ Customer specific rest pallet handling
- ✓ Special solutions for demanding ambient conditions
- ✓ Enclosure in stainless steel and special colours available



**Certificates**

- ✓ CE certified (EU)
- ✓ Optional: TR/EAC (RU)
- ✓ Optional: SASO (SA)
- ✓ Optional: UL 508 (US)

**Spare parts/maintenance**

- ✓ Full spare parts available worldwide
- ✓ Proven life expectancy of 10 years +
- ✓ Bespoke service support and preventive maintenance
- ✓ Telephone support

Models 910/920/930

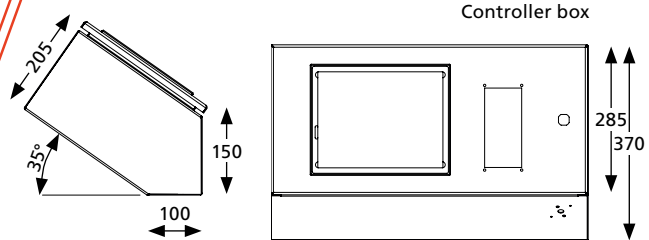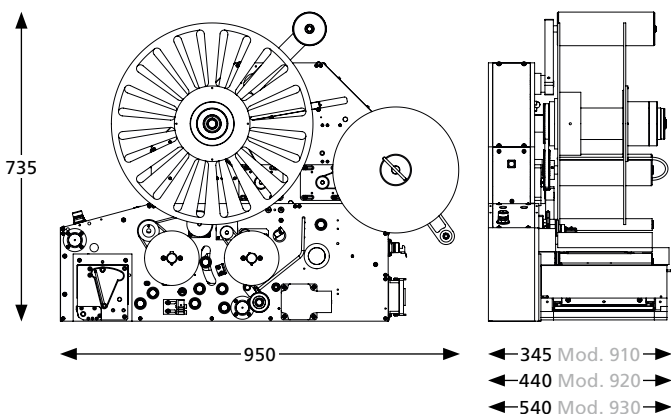

**Logopak Systeme GmbH & Co. KG**  
Dorfstraße 40 · D-24628 Hartenholm

[www.Logopak.com](http://www.Logopak.com)

Logopak Systems AB, Göteborg (SE)  
Logopak Corporation, Keene, NH (US)  
Logopak Eastern Europe, Warszawa (PL)

Logopak Int. Ltd., York (UK)  
Logopak S.A., Paris (FR)  
Logopak B.V., Lijnden (NL)